


Lead Flashing Weights

WIDTH mm Nom Imp		GREEN 3mtr Kg 6 mtr Kg code 3		BLUE 3mtr Kg 6 mtr Kg code 4		RED 3mtr Kg 6 mtr Kg code 5		BLACK 3mtr Kg 6 mtr Kg code 6		WHITE 3mtr Kg 6 mtr Kg code 7		ORANGE 3mtr Kg 6 mtr Kg code 8		WIDTH mm Nom Imp	
150	6"	7.0	13.5	9.0	18.5	11.5	23.0	13.5	27.0	16.0	32.0	18.0	36.0	150	6"
180	7"	8.0	16.0	11.0	22.0	14.0	27.5	16.5	32.5	19.5	38.5	22.0	43.5	180	7"
210	8"	9.5	19.0	13.0	26.0	16.0	32.0	19.0	38.0	22.5	45.0	25.5	51.0	210	8"
240	9"	11.0	21.5	15.0	29.5	18.5	36.5	22.0	43.5	26.0	51.5	29.0	58.0	240	9"
270	10"	12.0	24.5	16.5	33.0	20.5	41.0	24.5	49.0	29.0	58.0	32.5	65.0	270	10"
300	12"	13.5	27.0	18.5	36.5	23.0	45.5	27.0	54.0	32.0	64.5	36.0	72.5	300	12"
330	13"	15.0	30.0	20.0	40.5	25.0	50.5	30.0	59.5	35.5	71.0	40.0	80.0	330	13"
360	14"	16.0	32.5	22.0	44.0	27.5	55.0	32.5	65.0	38.5	77.0	43.5	87.0	360	14"
390	15"	17.5	35.0	24.0	48.0	30.0	59.5	35.0	70.5	42.0	83.5	47.0	94.0	390	15"
420	16"	19.0	38.0	26.0	51.5	32.0	64.0	38.0	76.0	45.0	90.0	51.0	101.5	420	16"
450	18"	20.5	40.5	27.5	55.0	34.5	68.5	40.5	81.5	48.0	96.5	54.5	109.0	450	18"
480	19"	21.5	43.0	29.5	59.0	36.5	70.0	43.5	87.0	51.5	103.0	58.0	116.0	480	19"
510	20"	23.0	46.0	31.0	62.5	39.0	78.0	46.0	92.0	55.0	109.5	61.5	123.0	510	20"
540	21"	24.5	48.5	33.0	66.0	41.0	82.5	49.0	97.5	58.0	116.0	65.0	130.5	540	21"
570	22"	26.0	51.5	35.0	70.0	43.5	87.0	51.5	103.0	61.0	122.0	69.0	138.0	570	22"
600	24"	27.0	54.0	37.0	73.5	46.0	91.5	54.0	108.5	64.5	128.5	72.5	145.0	600	24"
750	30"	34.0	67.5	46.0	92.0	57.0	114.5	68.0	135.5	80.5	161.0	90.5	181.5	750	30"
900	36"	40.5	81.0	55.0	110.0	68.5	137.0	81.5	162.5	96.5	193.0	109.0	217.5	900	36"
1000	39"	45.0	90.0	61.0	122.5	76.0	152.5	90.5	-	107.5	-	121.0	-	1000	39"
1050	41"	47.5	94.5	64.5	128.5	80.0	160.5	95.0	-	112.5	-	127.0	-	1050	41"
1200	47"	54.0	108.0	73.5	147.0	91.5	183.0	108.5	-	128.5	-	145.0	-	1200	47"
1350	53"	61.0	121.5	83.0	165.5	103.0	206.0	122.0	-	145.0	-	163.0	-	1350	53"
1400	55"	63.0	126.0	86.0	171.5	107.0	213.5	126.5	-	150.0	-	169.0	-	1400	55"
WEIGHT per sq. mtr		15.0kg		24.4kg		25.4kg		30.1kg		35.7kg		40.3kg		WEIGHT per sq. mtr	
THICKNESS		1.32mm (0.052")		1.80mm (0.071")		2.24mm (0.088")		2.65mm (0.088")		3.15mm (0.124")		3.55mm (0.140")		THICKNESS	
WEIGHT per sq. mtr		15.0kg		24.4kg		25.4kg		30.1kg		35.7kg		40.3kg		WEIGHT per sq. mtr	
THICKNESS		1.32mm (0.052")		1.80mm (0.071")		2.24mm (0.088")		2.65mm (0.088")		3.15mm (0.124")		3.55mm (0.140")		THICKNESS	

MAKE THE MOST OF
PREMIUM
CAST LEAD

A Quick Guide To Working
With Premium Cast Lead

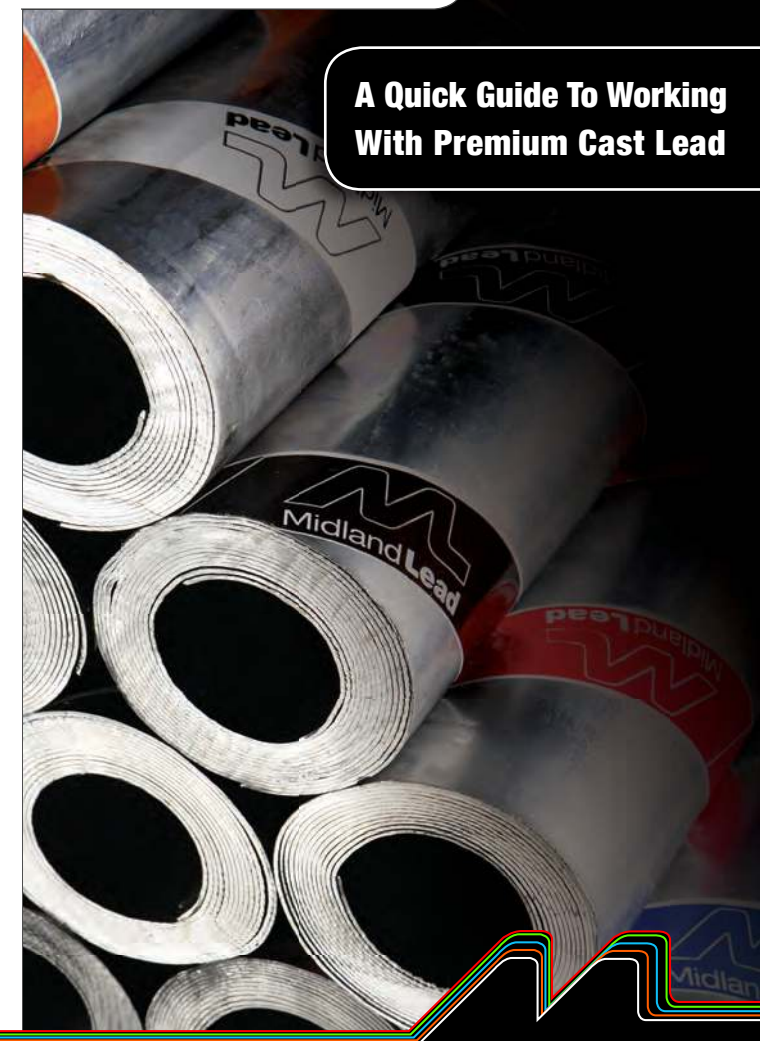

Midland Lead's premium cast lead sheet is made to BBA quality approval (BBA 86/1764) and is the ideal material to use for flashings and weatherproofing. Code numbers relate to the thickness of the lead sheet. Depending on where the lead is used, the appropriate code needs to be chosen, as indicated in the table below.

Application	Code 3 (1.32mm)	Code 4 (1.80mm)	Code 5 (2.24mm)	Code 6 (2.65mm)	Code 7 (3.15mm)	Code 8 (3.55mm)
Flat roofing/pitched roofing			√	√	√	√
Vertical cladding		√	√	√	√	
Soakers	√	√				
Hip and ridge flashing		√	√	√		
Parapet, box and tapered valley gutters			√	√	√	√
Pitched valley gutters		√	√	√	√	
Bay tops and canopies		√	√	√	√	√
Apron and cover flashings		√	√	√		
Chimney flashing		√	√	√		
Dormers			√	√	√	√

RECOMMENDED SIZES

The code and size of lead sheet are the most important factors in determining the success of the lead job. Individual pieces of lead sheet for sections, bays and panels, must not exceed the recommended sizes of the Lead Sheet Association.

In particular, each piece of flashing in Code 4 must be no longer than 1.5metres. For detailed information and fitting instructions, download our weightchart at:
www.midlandlead.co.uk/downloads,
 or ask for a print copy:
 +44 (0)1283 224 555.

Some tips from the manufacturer to make the most of Midland Lead's premium cast lead...

• STORAGE TIP

Lead sheet rolls and lead ancillary products should be stored in a clean and dry area. Preferably off the floor, on pallets.

• FINISHING TIP

To give your lead work an even better appearance, Midland Lead recommends the use of patination oil. Applying one layer of patination oil soon after the lead has been laid prevents white streaks and stains on the newly-laid work or on materials adjacent to it.

• FIXING TIP

If you are using our premium cast lead for flashings, we recommend Midland Lead fixing clips and sealant to fix the lead. These ancillary products allow you to fix flashings up to 20 times faster than using traditional wedges, and will give your job a professional finish.



FOUR REASONS WHY OUR LEAD SHOULD BE TOP OF YOUR LIST

1. Lead's value for money

Lead sheet has been used in building applications since Roman times and has a proven track record as a very durable weather proofer. Moreover, our premium cast lead sheet is BBA approved, has a 60 year guarantee and a life-expectancy of well beyond 100 years.

2. Lead is a sustainable weather proofer

Besides lead sheet's longevity, its recyclability makes it a very sustainable building material. Moreover, Midland Lead premium cast lead is manufactured with the use of recycled lead only.

3. Lead is fit for purpose

So, lead's value for money, sustainable, but most of all it's a fit for purpose. Lead is highly-resistant to corrosion and fully malleable, which makes it easy to use and ideal as a weatherproofing material. Also, because lead is heavy, it doesn't run the risk of lifting in high winds - unlike its non-lead alternatives.

4. Lead has got the looks

The use of a traditional building material such as lead, adds to the appearance of a building. Especially when the lead sheet has been finished with a layer of patination oil, which ensures a lasting attractive clear shine to the lead work.