

PFT G 4

Flexible, strong and a lot of potential

With the changeable pressure flange you can use strong D and R pumps. This ensures a lot of valuable production advantages on the job site. With the integrated phase sequence monitoring a trouble-free and efficient operation of the all-rounder PFT G 4 is ensured.




TECHNICAL DATA


Part no.	00 42 38 48
Working pressure	max. 30 bar
Conveying output	max. 85 litre / min
Conveying distance	up to 50 m
Motor	400 V, 3 Ph, 50 Hz, 5.5 kW, 400 rpm
Hopper content	145 litre
Rotor / Stator	TWISTER D 6-3
Spraying gun	DN25-360° S14 200 Geka
Air compressor	COMP M-250, 400 V, 3 Ph, 50 Hz, 0.9 kW, 250 l / min
Material outflow	DN35 male part
Material hose	RONDO DN25 - 10 m
Water pump	AV 1000 400 V, 3 Ph, 50 Hz, 0.6 kW
Dimensions: L/W/H	1,200 / 720 / 1,530 mm
Filling height	910 mm
Weight	~297 kg

Kindly note:

Conveying distance depends on the used materials.



ADVANTAGES AT A GLANCE

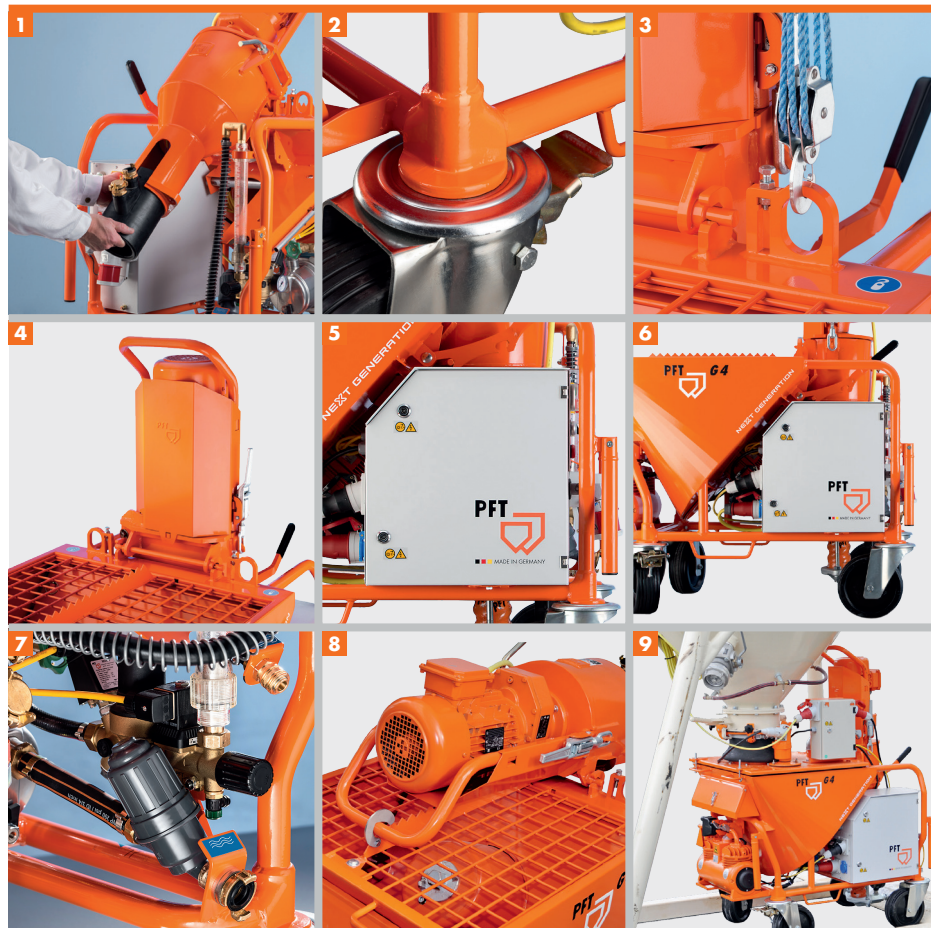

- 1** Easy cleaning - rubber mixing zone with adapter flange for D and R pump
 - 2** Reinforced tubular frame and robust wheel mounts
 - 3** Forklift straps and crane lifting eyes
 - 4** Deflector - prevents whirling currents in the container
 - 5** Large control unit - maintenance-friendly and dust protection
 - 6** Switches and connectors are within the basic frame
 - 7** Large fine mesh water filter
 - 8** Practically transport safety for the mixing tube, reduce the high of the machine
 - 9** Easy, quick and efficient - to fill the machine with material:
 - Direct filling from silo with delivery hood
 - Filling by bags
 - Pneumatic filling with conveying machine PFT SILOMAT
- Flexible mixing intensity thanks to two water inlets
 - Safe transport thanks to four holders with folding mechanism
 - Maintenance-friendly - water manifold and pressure switch are easily accessible

FIELDS OF APPLICATION

- Gypsum plaster
- Lime-gypsum plaster
- Cement plaster
- Insulation material
- Lime-cement plaster
- Fango material
- Insulation plaster
- Recessed material
- Masonry mortar
- Floor screed
- Levelling compound
- Adhesive mortar

ACCESSORIES

- Extension cable 5 x 4 mm², RED 5-32 A - 50 m
- Anti-dust unit
- Injection hood with level sensor and control cable
- Delivery hood
- ZARGOMAT pro DN25-360°
- JETSET pro DN25 Ewo

PART NO.

- 20 42 39 00
- 00 43 24 13
- 20 60 02 13
- 20 60 05 00
- 00 42 00 58
- 00 41 89 75



The PFT Service guarantee

Customer-friendliness, technical expertise and service-orientation. That's what the PFT brand with its sales and service centers worldwide stands for also in the coming decades.



Click. Discover. Experience.

www.pft.eu/360_G4
www.youtube.com/knaufpften

Download now! APP: PFT - Plastering Technology

Knauf PFT GmbH & Co. KG

Einersheimer Str. 53 · 97346 Iphofen

Technical Hotline +49 9323 31-1818

Phone +49 9323 31-760

Fax +49 9323 31-770

info@pft-iphofen.de www.pft.eu

All rights reserved. Subject to change without prior notice. Our warranty refers only to the perfect condition of our machines. Consumption, quantity, design specifications and performance data are empirical values, which cannot be transferred automatically in case of deviating conditions. In addition, the guidelines of the material manufacturer are always applicable. Changes, reprints and photomechanical reproductions, even in parts, require the approval of Knauf PFT GmbH & Co. KG.

PFT G 4 - GB/03.16/PFT